230v/24v NC ACTUATOR TECHNICAL DATA

PRODUCTS FOR THE BUILT ENVIRONMENT



ACTUATOR TIO BRAND ACTUATOR (NC)

TIOACT0001 Tio Brand Actuator (Nc) 230v TIOACT0002 Tio Brand Actuator (Nc) 24v

Easy install actuator in 230v or 24v options. The unit comes normally open (NO) with retaining clip. Once removed the opening function is normally closed (NC).

The cable has 2 wires with neutral and live, it has an extended length of 780mm.

The Tio Actuator is available in 230v and 24v, please use the appropriate product for your supply.

The unit comes with live and neutral wiring with easy clips for clean installation into the Tio wiring center.


A quick reaction wax capsule is fitted within the unit to allow for reduced reaction times of >1 minute for the associated port to open.

The metal connecting ring is $M30 \times 1.5$

KEY FEATURES

- Low power consumption 2W
- Retaining clip to ease first use (product arrives Normally Open)
- Adaptive stroke length 4mm
- 5 year warranaty

OPERATION	NC = NORMALLY CLOSED
N:	NEUTRAL
L:	LIVE

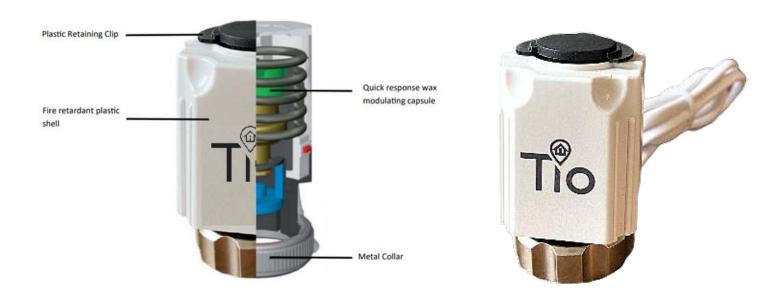



TIO Climate Solutions c/o H&H Distribution Unit X&Y The Steventon Depot Hanney Road OX13 6DJ



www.tioclimatesolutions.co.uk 01235 242710 office@tioclimatesolutions.co.uk